
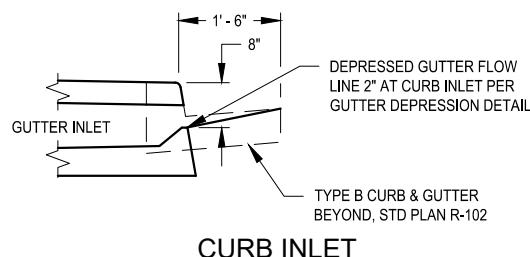
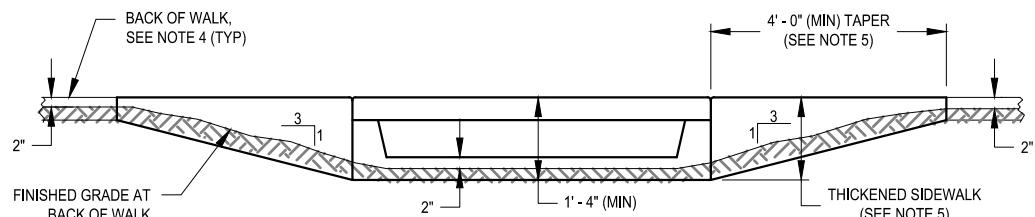


GENERAL NOTES:

1. PRECAST CURB INLETS SHALL BE CONSTRUCTED IN ACCORDANCE WITH ASTM C-478 (AASHTO M-199) & ASTM C-890.
2. TOP SURFACE TO BE BROOM FINISHED.
3. ALL EXTERNAL EDGES NOT LABELED SHALL BE TROWELED WITH A 3/8" TO 1/2" RADIUS.
4. SEE SIDEWALK, STANDARD PLAN E-103.
5. SIDEWALK TAPER SHALL BE THICKENED TO 1'-4" (MIN) TO MATCH THICKNESS OF TYPE 2 CURB INLET, TYPICAL BOTH SIDES.

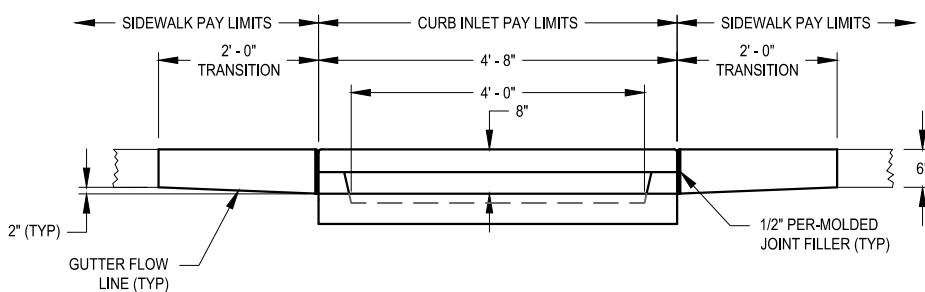

APPROVED BY:

ROBERT B. BLEGEN, P.E.
PUBLIC WORKS DIRECTOR

CURB INLET TYPE 2

**STANDARD PLAN NO.
S-111**

PUBLICATION DATE: 03/2025

REVISION NO.: 01