


ELEVATION VIEW

**GENERAL NOTES:**

1. WHEN PVC PIPE IS USED, A SAND COLLAR SHALL BE INSTALLED.
2. PIPE SHALL BE 10" MINIMUM DIAMETER.
3. AFTER THE PIPE IS INSTALLED, FILL THE GAP WITH NON-SHRINK GROUT IN ACCORDANCE WITH STANDARD SPECIFICATION 9-20.3.
4. THIS PLAN INCLUDES INSTALLATION DETAILS ONLY. FOR FABRICATION DETAILS SEE APPROPRIATE WSDOT STANDARD PLANS AND SPECIFICATIONS.
5. DOWN TURNED 90 DEGREE ELBOW MAY BE USED IN PLACE OF THE TEE. TEE/ELBOW TO REMAIN REMOVABLE FOR MAINTENANCE.

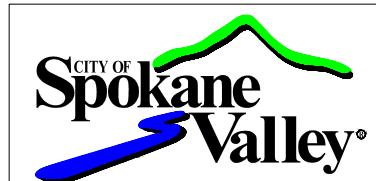

APPROVED BY:

ROBERT B. BLEGEN, P.E.  
PUBLIC WORKS DIRECTOR

**SPILL CONTROL  
SEPARATOR**

**STANDARD PLAN NO.  
S-140**

PUBLICATION DATE: 03/2025

REVISION NO.: 01