


OFFSET CUL-DE-SAC

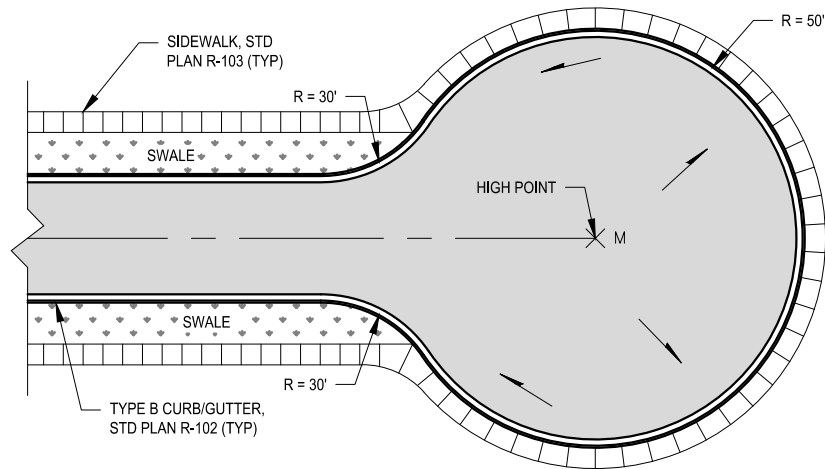

TYPICAL CUL-DE-SAC

GENERAL NOTES:

1. M = MONUMENT LOCATIONS, ER = END RETURN, SI = STREET INTERSECTION.
2. ADA RAMPS WILL BE INSTALLED BEFORE THE ER IF THE SIDEWALK IS NOT INSTALLED AROUND CUL-DE-SAC.
3. SIDEWALK AROUND BULB IS OPTIONAL, IF PROVIDED, SIDEWALK MAY BE SEPARATED OR ADJACENT. IF ADJACENT THE SIDEWALK SHALL BE 6.0' WIDE.
4. RADIUS SHOWN IS TO FACE OF CURB.
5. THE WIDTH OF RIGHT-OF-WAY AND THE STREET DIMENSIONS SHALL CONFORM TO THE CLASSIFIED STREET SECTION.
6. MINIMUM CURB GRADES ON CUL-DE-SACS SHALL BE 1%.
7. PUBLIC STREETS W/ STUBS ENDS ARE LIMITED TO 600' MEASURED FROM THE SI TO THE ER OF THE CUL-DE-SAC OR THE TERMINUS OF THE TRAVELWAY.
8. NON-MOTORIZED PATHS (7.5.11) TO ADJACENT ARTERIALS OR PUBLIC FACILITIES, SUCH AS SCHOOLS/PARKS MAY BE REQUIRED AT THE DEAD-END OF THE STREET TO SHORTEN WALKING DISTANCES.



APPROVED BY:

ROBERT B. BLEGEN, P.E.
PUBLIC WORKS DIRECTOR

**CUL-DE-SAC PUBLIC
STREETS**

**STANDARD PLAN NO.
R-130**

PUBLICATION DATE: 03/2025

REVISION NO.: 01