



PLAN VIEW

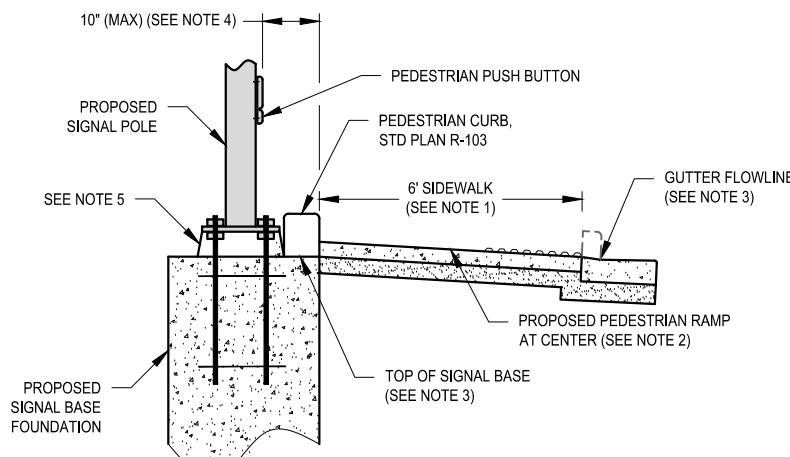

SECTION A-A

GENERAL NOTES:

1. DUE TO VARIOUS RAMP STYLES AND CONFIGURATIONS, THE HORIZONTAL DISTANCE FROM FACE OF CURB TO SIGNAL POLE MAY VARY.
2. CROSS SLOPE IS $1.5\% \pm 0.5\%$, 2% MAX. SIDEWALK SHALL NOT EXCEED ADA STANDARDS.
3. SIDEWALK CONFIGURATIONS MAY DIFFER. ALWAYS USE GUTTER/FLOWLINE AT CENTER OF RAMP TO DETERMINE SIGNAL BASE HEIGHT. TOP OF SIGNAL BASE FOUNDATION SHALL BE SET 3" BELOW THE GUTTER FLOWLINE ELEVATION.
4. PEDESTRIAN PUSH BUTTON SHALL NOT BE MORE THAN 10 HORIZONTAL INCHES FROM CLEAR EDGE OF RAMP, PEDESTRIAN WALL, OR OTHER OBSTRUCTIONS.
5. PROVIDE A MINIMUM 1 INCH CLEAR SPACE BELOW LOWER ADJUSTING NUT.
6. SEE STANDARD PLAN R-109 FOR INDIVIDUAL RAMP SPECIFICATIONS.

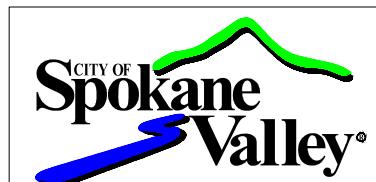

APPROVED BY:

ROBERT B. BLEGEN, P.E.
PUBLIC WORKS DIRECTORSIGNAL POLE BASE
AT CURB RAMPSTANDARD PLAN NO.
U-103PUBLICATION DATE: 03/2025
REVISION NO.: 01